

Karakteristika sesalne enote po IEC 60312 Vacuum Cleaner Motor Performance in Accordance with IEC 60312


Oznake / Marking			
Napetost / Voltage:	120	[V]	Nazivna moč / Nominal power:
Frekvenca / Frequency:	60	[Hz]	1600 [W]

Napetost	Premer odprtine	Tok	Vhodna moč	Vrtilna frekvenca	Podtlak	Pretok	Zračna moč	Izkoristek
Voltage	Orifice	Current	Input Power	Speed	Vacuum	Air Flow	Air Power	Efficiency
[V/Hz]	[mm]	[A]	[W]	[1/min]	[kPa]	[dm ³ /s]	[W]	[%]
120/60	50	14,70	1722,13	41027	1,44	57,22	82,49	4,79
120/60	40	14,53	1701,33	41104	3,32	55,32	183,55	10,79
120/60	30	14,33	1680,64	41576	8,71	49,74	433,04	25,77
120/60	23	13,69	1609,16	42759	16,70	39,66	662,35	41,16
120/60	19	12,87	1516,50	44395	21,76	30,51	663,83	43,78
120/60	16	12,10	1429,73	46220	25,43	23,19	589,83	41,26
120/60	13	11,35	1345,53	48484	28,34	16,09	455,96	33,89
120/60	10	10,58	1257,93	51233	29,31	9,71	284,68	22,63
120/60	6,5	9,52	1135,06	54485	29,18	4,16	121,33	10,69
120/60	0	8,88	1061,75	58044	30,45	0,00	0,00	0,00

** Zahteve kupca / Customer Demands; ° Pomerjeno po 20s / Measured after 20 seconds

Mejne vrednosti / Guaranteed values

**	Maksimalna moč / Maximal power:	P_{1max} [W]	=	1700	±	50
	Srednja moč / Mean power:	P_{min} [W]	≥	1360		
	Podtlak / Vacuum:	P_{max} [kPa]	=	30,4	±	1,5
	Pretok pri ϕ 50 / Air Flow at ϕ 50:	$Q_{\phi 50}$ [dm ³ /s]	=	57	±	3
**	Zračna moč / Air Power:	P_{2max} [W]	=	660	±	20
	Izkoristek / Efficiency:	η_{max} [%]	=	44	±	2
	Masa / Mass:	m [kg]	=	1,28		

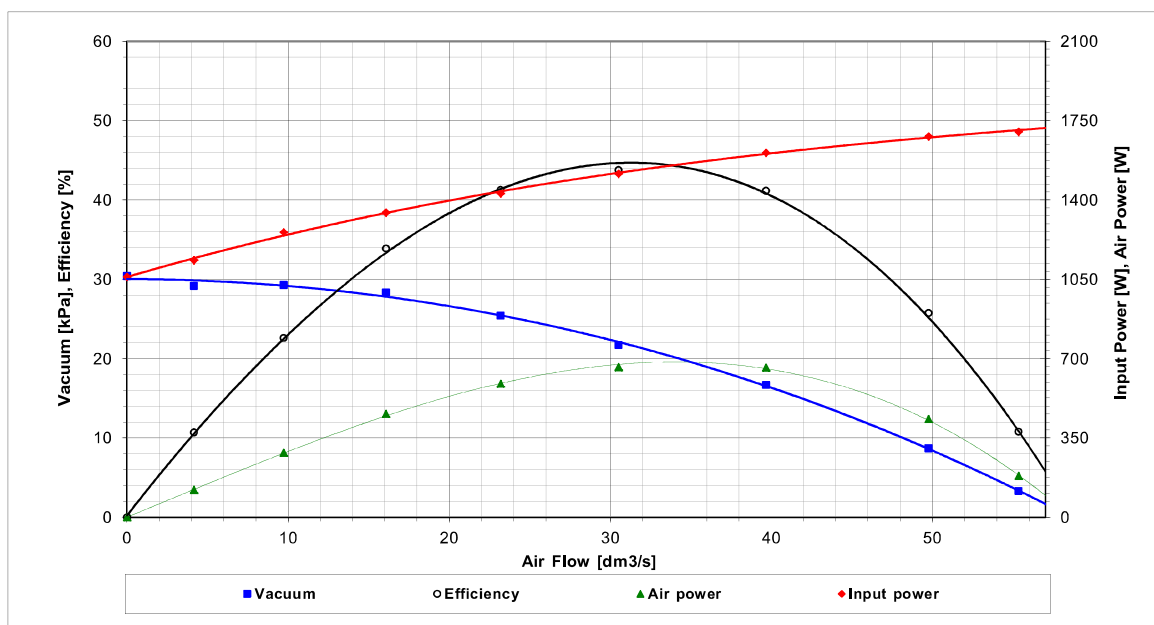

				datum	ime	naziv	
			izdelal			KARAKTERISTIKA SESALNE ENOTE VACUUM CLEANER MOTOR PERFORMANCE	
			pregledal				
						koda	list 5
						KA 463.3.606	stran 1+
ozn.	št. obvestila	datum	ime	Otoki 21, 4228 Železniki, Slovenija		pripadnost	namesto

